


The Ultraflat 54 floor drain DN 40, enclWPM, Des grating

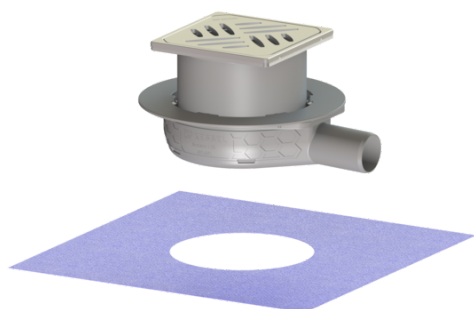

Article information

Item no.: 44740.62
 GTIN: 4026092080801
 Price group: 10

Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

Description

The Ultraflat 54 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section.

Variant	
System:	125
SonicControl:	optional
Waterproofing layer on the drain body:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water supply:	W2-I
Sealing water height:	22 mm
General characteristics	
Nominal size (DN):	40
Outer diameter (OD):	40 mm
Dimensions	
Vertical adjustment:	63 - 116 mm
Net weight:	0,86 kg
Gross weight:	0,86 kg
Vertical adjustment:	vertically adjustable upper section
Length:	246 mm
Width:	200 mm
Height:	54 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Number of outlets:	1
Material of drain body:	ABS

Coverage features

Type of cover:

Cover material:

Colour of cover:

Width of cover:

Height of cover:

Length of cover:

Surface:

Frame material:

Cover locking:

Load class:

Grating colour:

Rim length:

Rim material:

Shape of upper section:

Upper section material:

Odour trap:

Design cover

Stainless steel 14301

silver

120 mm

16 mm

120 mm

ground

Stainless steel 14301

unlocked

L 15 (EN 1253-1)

Kessel

132 mm

132 mm

square

ABS

included